


ESCUTCHEON LEVER AND BALL KNOB TRIM

TEMPLATE: W53525
REV. 0 12-18-24

MORTISE FUNCTIONS MR257 MR259

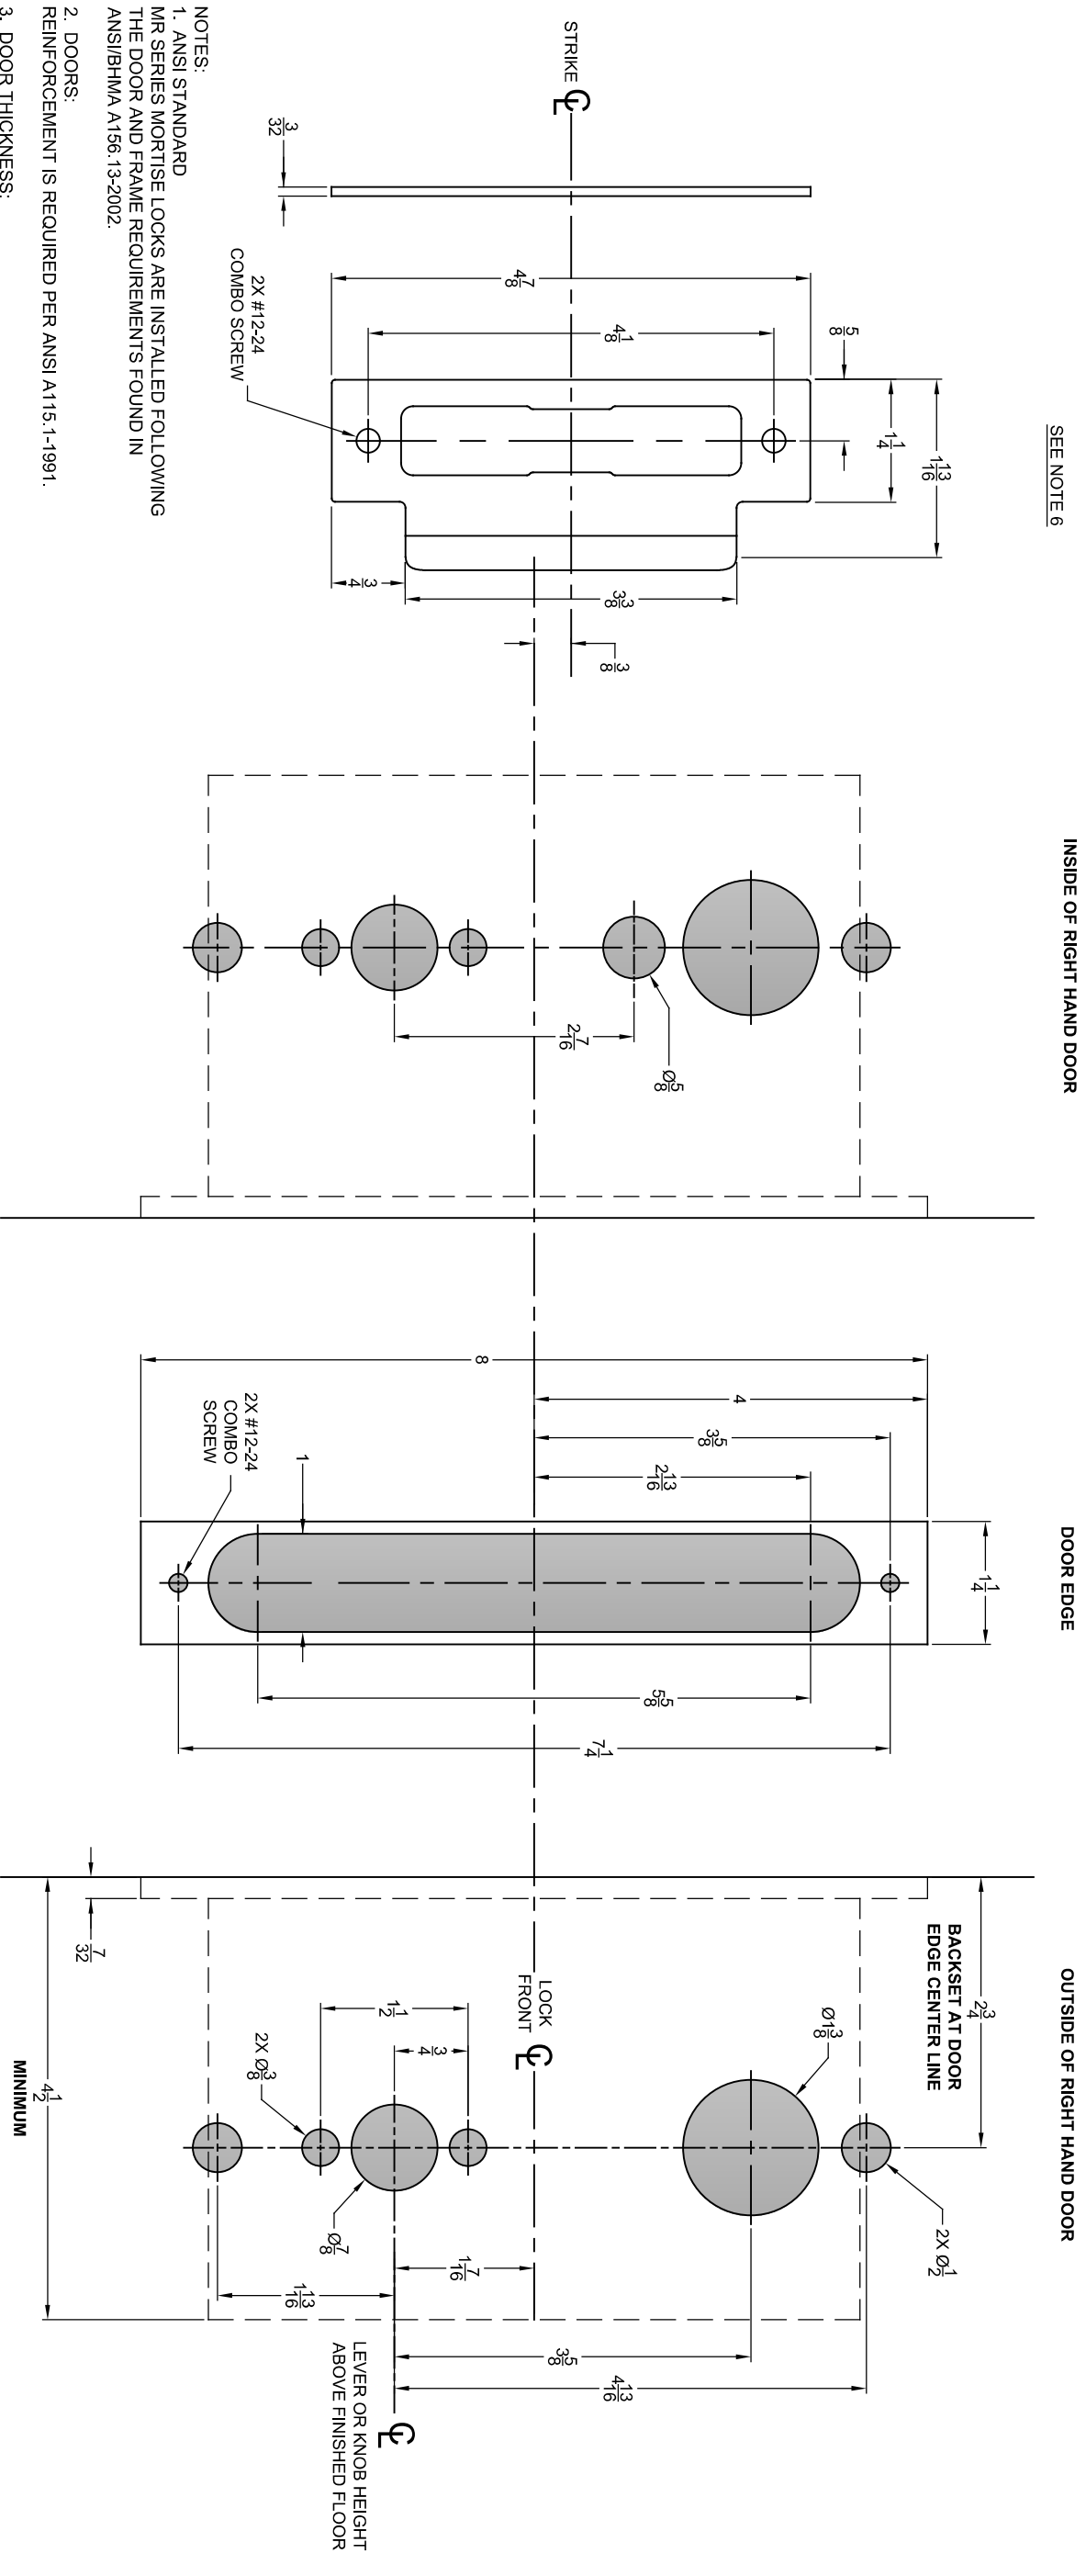

SEE NOTE 6

INSIDE OF RIGHT HAND DOOR

DOOR EDGE

OUTSIDE OF RIGHT HAND DOOR

- NOTES:
- ANSI STANDARD MR SERIES MORTISE LOCKS ARE INSTALLED FOLLOWING THE DOOR AND FRAME REQUIREMENTS FOUND IN ANSI/BHMA A156.13-2002.

- DOORS: REINFORCEMENT IS REQUIRED PER ANSI A115.1-1991.

- DOOR THICKNESS: STANDARD DOOR THICKNESS IS 1-3/4". CONSULT FACTORY FOR OTHER DOOR SIZES.

- LEAD LINING: ADD 1/8" TO MORTISE WIDTH WHEN PREPARING DOOR FOR A LEAD LINED MR SERIES MORTISE LOCK BODY.

- SILENCERS AND WEATHER STRIPPING: PROVISIONS MUST BE MADE TO ALLOW PROPER DOOR CLOSURE WHEN USING DOOR SILENCERS, WEATHER STRIPPING OR SOUND PROOFING.

- DIMENSIONS FOR STRIKE ARE NOT APPLICABLE FOR THE ELECTRIC STRIKE. SEE ELECTRIC STRIKE MANUFACTURERS TEMPLATE FOR DETAILS.